

www.atten.com

ATTEN

Product Catalog

2022



ABOUT US

- ✧ One of the largest and most powerful electronic instrument and electronic tool manufacturers in China, located in Guangming District, Shenzhen City since it was founded in 1996.
- ✧ The member of China Soldering Station Industry Standard Committee and National Standardization Technical Committee of Home Appliances.
- ✧ Transferred successfully from an OEM factory into a widely accepted brand enterprise and was titled many times as the "National New High-tech Enterprise" through continuously brought in professional work staff and international management principles.
- ✧ A system work solution provider experienced in developing, manufacturing, sales and after-sales services, and focused in the following two industrial categories:
 1. Advanced soldering and desoldering tools including lead-free soldering station, hot air station, rework system, BGA rework station.
 2. Linear DC power supply, switching power supply and programmable power supply.
- ✧ Enterprise obtained ISO9001:2015 quality control system. Products approved by CE, RoHS 2.0, UKCA, KC, SAA and CCC.
- ✧ Establishing worldwide distribution network and local cooperation partnership.



Hot Air Station ST-862D



Features:

- LCD display screen making control visualization.
- Temperature unit switching function.
- Temperature locking ,timed work function.
- MCU controlled temperature calibration,compensation for constant working .
- Strong air volume with brushless fan.
- Easy to replace with pluggable heater.
- Convertible with straight air and spiral air.
- Auto-sleep function.

The standard nozzles : A-2605 A-2664 B-2608 B-2610
A-2600 nozzle converter

Note: ST-862D nozzles details in page 28.

Soldering Station ST-1509



Features:

- Design with LCD display screen making control visualization.
- Buttons(1,2,3) for pre-setting or switching frequently used temperature.
- Auto sleep ,auto standby ,auto shutdown function to keep soldering work safer and extend machine lifespan .
- Has temperature locking, temperature calibration ,temperature alarming ,auto shutdown heating , password protecting function .
- Temperature read out in °C and °F .
- Compatible with various type of soldering tools .
- Heating-up very fast with replaceable integrated heater.

Note: Integrated heater details in page 8-9.(T950/T9100/T9130/T9150)

Power Supply APS22-5A



Features:

- Controlled by MCU digital and series adjustment, low ripple, low noise and high stability.
- Designed with double types of tables, more suitable for telecommunication devices.
- Fast dynamic load response speed, optimized proceed for communication equipments.
- Support automatically recovered overcurrent protection(OCP) and overheating function(OHP).
- Independent USB interface, which can provide current 3A output, support overcurrent and short circuit protection.

ST-1509

Intelligent Soldering Station

ESD
SAFE



heater

Features:

- Design with LCD display screen making control visualization.
- Buttons(1,2,3) for pre-setting or switching frequently used temperature.
- Auto sleep ,auto standby ,auto shutdown function to keep soldering work safer and extend machine lifespan .
- Has temperature locking, temperature calibration ,temperature alarming ,auto shutdown heating , password protecting function .
- Temperature read out in $^{\circ}\text{C}$ and $^{\circ}\text{F}$.
- Compatible with various type of soldering tools .
- Heating-up very fast with replaceable integrated heater.

Specification:

Item No	ST-1509			
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz			
Power	150W			
Temperature range	80 $^{\circ}\text{C}$ ~480 $^{\circ}\text{C}$			
Temperature accuracy	$\pm 10^{\circ}\text{C}$			
The handle type	Y950 /Y9130 /Y9150 /N9100 optional			
Soldering tip/Heater	T950-0.1IS T950-2.0SK / T9130-1.0I T9130-K / T9150-K T9150-B / T9100-0.5I optional			
Soldering stand	S-13			
Package list	Main unit: 1unit AC cord: 1 PCS	Iron Stand: 1PCS integrated heater with tip: 2 PCS	Manual: 1 PCS	Iron Handle Set: 1PCS
Standard Packing	Inner box: 28.2x21x18.7(cm) N.W.: 3kg G.W.: 3.3kg Carton: 6PCS/Carton Size: 43.5x30x58(cm) N.W.: 19.8kg G.W.: 20.8kg			
Applicable	● Production line ● Education and practice ● Institutes ● Maintenance ● Enterprises ● Hobby			

Note: Integrated heater details in page 10–11.(T950/T9100/T9130/T9150)

ST-1503/ST-1503D

ESD
SAFE

High frequency soldering station



Features:

- All kinds of parameter data and information in the form of graphics display.
- MCU controlled temperature calibration, compensation for constant working .
- High power and Great thermal recovery.
- Provide 3 groups shortcut temperature to simplify operations.
- Temperature read out in $^{\circ}\text{C}$ and $^{\circ}\text{F}$.
- Intelligent temperature calibration function.
- Intelligent temperature control fan, suitable for high-intensity work
- ST-1503D With RS485 communication interface


Specification:

Heater HS-3150H

Item No	ST-1503	ST-1503D
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz	
Power	150W	
Temperature range	80 $^{\circ}\text{C}$ ~600 $^{\circ}\text{C}$	
Soldering tip	T500-4C	
The handle type	SP-H150	
Heater	HS-3150H	
ITO Function	No	Yes
Tip-to-ground impedance:	<2 Ω	
Tip-to-ground voltage:	<2mV	
Standard Packing	Inner box: 29x26x18.5(cm) N.W.: 5kg G.W.: 5.5kg Carton:4PCS/Carton Size: 30.5x53.5x39.5(cm) N.W.: 22kg G.W.: 23kg	
Applicable	● High frequency and high power, fast temperature recovery, suitable for soldering big solder joints ● Suitable for soldering and desoldering the big solder joints in industrial products ● Widely used in the production line of all the kinds of enterprises	

Note: T500 series soldering tip details in page 21.

IOT Function ST-1503D

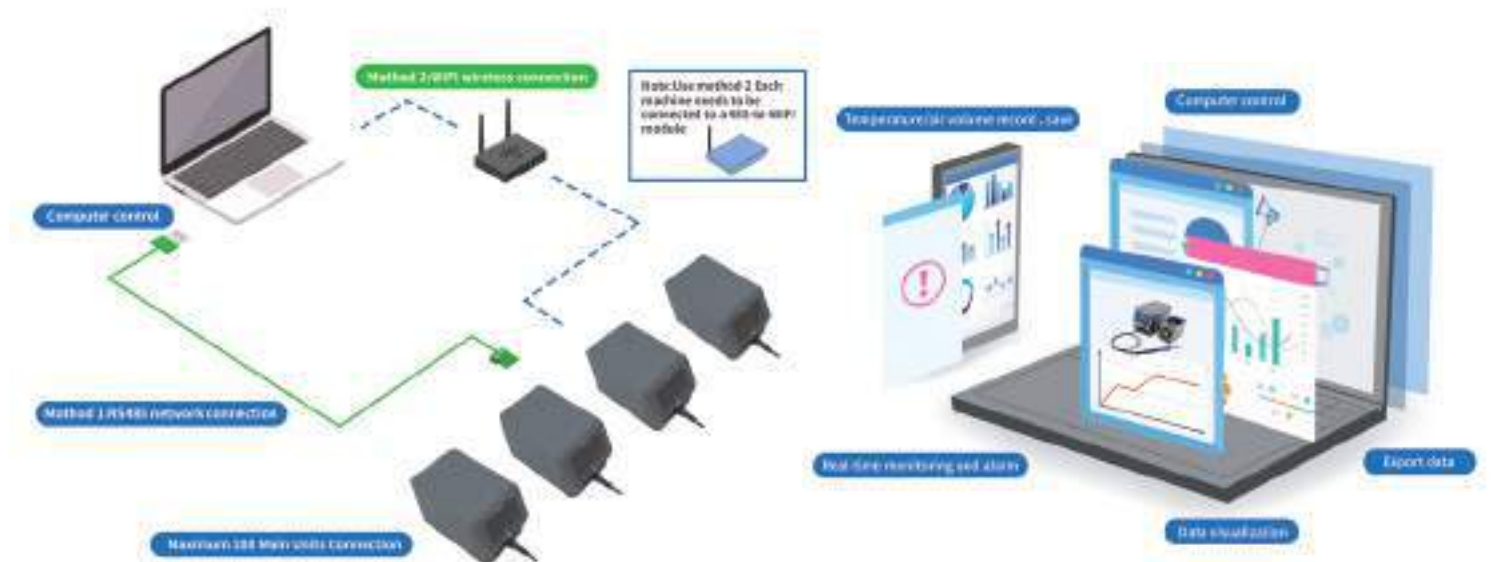

Intelligent management platform

Soldering station built-in 485 communication module(Wireless communication module can also be installed),can be docked with intelligent management platform software system,Realization: interconnected real-time monitoring, process preservation and copying, data storage and traceability, statistical analysis and management, monitoring and alarm prompts, remote control.

ST Series Soldering Station



Features:





















- Temperature locking.
- Beep alarm function available.
- MCU controlled temperature calibration.
- User-friendly menu enables system setting easier.
- Separate iron stand to save room and to make easier deposit.
- Buttons(1,2,3) for pre-setting or switching frequently used temperature.
- Low-voltage heater separated from power supply to keep soldering work safer.

Specification:









Product pictures			
Item No	ST-80	ST-909	ST-100
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz		
Power	80W	90W	100W
Temperature range	150°C~480°C	200°C~500°C	150°C~480°C
Temperature Stability	±2°C(in still air,no load)	±2°C(in still air,no load)	±2°C(in still air,no load)
The handle type	SP-80	SP-990	SP-100
Soldering tip type	T900-B	T990-K	T800-0.25I
Heater	High performance four-core ceramic heater HS-3080	Integrated heater	Sliver alloy heater HS-3100
Package list	Main unit: 1unit Iron stand: 1 PCS Manual: 1 PCS Handle set : 1 PCS AC cord: 1 PCS Cleaning sponge: 1 PCS		
Standard Packing	Inner box: 31.5x27x15.2(cm) N.W.: 2.09kg G.W.: 2.32kg Carton: 6PCS/Carton Size: 55.5x33x48(cm) N.W.: 14.4kg G.W.: 15.4kg	Inner box: 24.6x22.4x14.2(cm) N.W.: 2.2kg G.W.: 2.4kg Carton: 8PCS/Carton Size: 50.7x46.3x30.9(cm) N.W.: 19.2kg G.W.: 20.0kg	Inner box:31.5x27x15.2(cm) N.W.: 2.68kg G.W.: 2.95kg Carton: 6PCS/Carton Size: 55.5x33x48(cm) N.W.: 17.9kg G.W.: 19.0kg
Applicable	● Institutes ● Enterprises ● Education and practice ● Maintenance ● Hobby		

Note: T800 series soldering tip details in page 22. T990 series soldering tip details in page 21.
T900 series soldering tip details in page 29.

Soldering tips (T990)

			
 T990-B	 T990-B2	 T990-B3	 T990-B4
 T990-BC1	 T990-BC2	 T990-BC3	 T990-BL
 T990-C1	 T990-C4	 T990-D4	 T990-D08
 T990-D16	 T990-D12	 T990-D24	 T990-D52
 T990-I	 T990-KU	 T990-K	


Soldering tips(T500)

 T500-3.5D ACF028935	 T500-3C ACF028938	 T500-6C ACF028941	 T500-SK ACF029746
 T500-5D ACF028936	 T500-4C ACF028939	 T500-8C ACF028942	 T500-B ACF029754
 T500-8D ACF028937	 T500-5C ACF028940	 T500-K ACF028943	



Soldering tips (T800)




T800-0.25I
ACF028944




T800-1.2C
ACF028948




T800-0.8D
ACF028952




T800-4.6D
ACF028955




T800-0.5I
ACF028945




T800-2.4C
ACF028949




T800-1.6D
ACF028953




T800-K
ACF028956




T800-1.0I
ACF028946




T800-3.2C
ACF028950





T800-3.2D
ACF028954




T800-4.6C
ACF028951




T800-1.4I
ACF028947



T800-2.4D
ACF029745




T800-SK
ACF029744




T800-0.25ILF
ACF028957




T800-2.4CLF
ACF028960




T800-1.2CLF
ACF028958




T800-2.4DLF
ACF028959




T800-2.0KLF
ACF028963



T800-1.6DLF
ACF028961



T800-3.2DLF
ACF028962



ST-2090D

Multifunctional Soldering Station



Features:

- This product designed with digital led segmented display
- Combined soldering station with soldering stand.
- MCU controlled temperature calibration with PID system equipped, adjust temperature by knob button, easy to operate.
- The handle structure is ergonomically designed for comfortable grip.
- The heating wire and sensor are made of PTC material, which is quick in temperature rise and precise in temperature control.
- Auto-standby, auto-shut down is available.
- Using 3 cored power cable.



High quality four-core
wire heater HS-2065A

Specification:

Item No	ST-2090D		
Voltage	110/240V AC		
Power	80W		
Temperature range	80°C~480°C		
Temperature accuracy	±15°C		
Temperature Stability	±2°C(in still air,no load)		
Temperature unit	°C/°F		
Soldering tip type	T900-B		
Package list	Main unit (including machine, power cable and handle)x1pc Soldering wire holder x 1pc User manual x 1pc		
Standard Packing	Inner box: 20x18x12.5(cm) N.W.: 0.7kg G.W.: 0.91kg Carton: 12PCS/Carton Size: 41.5x37.5x39(cm) N.W.: 11kg G.W.: 11.8kg		
Applicable	● Production line ● Institutes ● Enterprises ● Education and practice ● Maintenance ● Hobby		

Note: T900 series soldering tip details in page 30.

AT-937 ESD SAFE

ESD Safe Constant Temperature
Controllable Soldering Station



AT-989 ESD SAFE

ESD Safe Constant Temperature
Controllable Soldering Station




AT989D ESD SAFE

ESD Safe Constant Temperature
Controllable Digital Soldering Station



Features:

- MCU controlled temperature calibration with PID system equipped.
- The heater using low voltage AC source to ensure the antistatic and no leakage, no interference.
- Legerity handle suitable for long time operation.
- Unique temperature locks setting to avoid adjusting temperature.

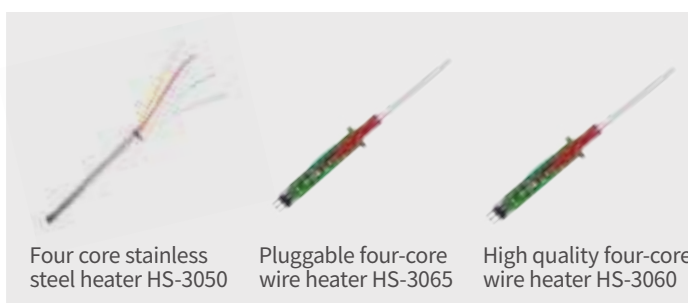

Specification:

Item No	AT-937	AT-989	AT-989D
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz		
Power	50W	65W	65W
Temperature range	200°C~480°C	200°C~480°C	80°C~480°C
Temperature Stability	±2°C(in still air,no load)	±2°C(in still air,no load)	±2°C(in still air,no load)
The handle type	AP-50	AP-65A	AP-60A
Soldering tip type	T900-B	T900-B	T900-B
Heater	Four core stainless steel heater	High quality four-core wire heater	High quality four-core wire heater
Package list	Main unit: 1unit Handle set : 1 PCS Iron stand: 1 PCS AC cord: 1 PCS Manual: 1 PCS Cleaning sponge: 1 PCS		
Standard Packing	Inner box: 25x21x13.4(cm) N.W.: 1.73kg G.W.: 2.00kg Carton: 12Carton/Carton Size: 51.5x44x43(cm) N.W.: 24.0kg G.W.: 25.0kg		
Applicable	● Production line ● Education and practice ● Institutes ● Maintenance ● Enterprises ● Hobby		

Note: T900 series soldering tip details in page 30.

ST-8800D ESD SAFE

Intelligent hot air station



A-2000 nozzle converter
for all nozzles of AT-852D,
AT-850D and AT-8502D



A-2131



A-2104



A-2102



A-2105



heater HR-2700A

Features:

- Large LCD screen; Temp/Air adjust easily.
- Touch sensor inside, auto sleep function will take effect when hot air gun placed on the stand.
- Use brushless vortex fan making cyclone air output more gentle and evenly.(Offer 4 nozzles).
- Has automatic large air volume cooling function, effectively protect the life of heating core and handle.
- Has independent cold air function, can deal with special use purpose.
- Three sets of quick temperature keys, can be set and save independently, use easily.
- Has password protection and key lock function, make control easily.
- With timing function and temperature compensation function, make use flexibly.

Specification:

Item No	ST-8800D			
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz			
Power	800W			
Temperature range	100°C~500°C			
Temperature accuracy	±35°C			
Air flow	30-120L/Min			
Standby heater cooling function	Support			
Beep alarm function	Available			
Package list	Main unit: 1unit Gun Holder : 1 PCS	Hot air gun: 1 PCS AC cord: 1 PCS	Manual: 1 PCS Nozzles: 4 PCS	Nozzle converter
Standard Packing	Inner box: 35.2x23x20(cm) N.W.: 1.56kg G.W.: 1.75kg Carton: 4PCS/Carton Size: 48x37x42(cm) N.W.: 7kg G.W.: 7.8kg			
Applicable	● Production line ● Education and practice ● Institutes ● Maintenance ● Enterprises ● Hobby			

Nozzles details in page 30.

ST-8802

Double Channels rework system

ESD
SAFE



Features:

- Large LCD screen; Temp/Air adjust easily.
- Touch sensor inside, auto sleep function will take effect when hot air gun placed on the stand.
- Use brushless vortex fan making cyclone air output more gentle and evenly.(Offer 4 nozzles).
- Has automatic large air volume cooling function, effectively protect the life of heating core and handle.
- Has independent cold air function, can deal with special use purpose.
- Three sets of quick temperature keys, can be set and save independently, use easily.
- Has password protection and key lock function, make control easily.
- With timing function and temperature compensation function, make use flexibly.

Specification:

Item No	ST-8802			
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz			
Name	Hot air station		Soldering station	
Total Power	800W		65W	
Temp range	100°C~500°C/212°F~932°F		80°C~480°C/176°F~896°F	
Temp stability	±5°C		±2°C	
Air flow	120L/min			
The handle type	AP-800B		SP-65A	
Soldering tip			T900-0.2SI	
Package list	Main unit: 1unit Gun Holder : 1 PCS	Hot air gun: 1 PCS AC cord: 1 PCS	Manual: 1 PCS Nozzles: 4 PCS	Iron Handle Set: 1PCS Iron Stand: 1PCS
Standard Packing	Inner box: 29.5x24.8x18.8(cm) N.W.: 2.75kg G.W.: 3kg Carton: 6PCS/Carton Size: 48x37x42(cm) N.W.: 18kg G.W.: 18.8kg			
Applicable	● Institutes ● Enterprises ● Education and practice ● Maintenance ● Hobby			

Nozzles details in page 30.

AT852D

Lead-free & ESD Safe Premium Digital Hot Air Station

ESD
SAFE



Features:

- Closed-loop and MCU zero crossing design for achieving fast heating-up, accurate and stable control.
- High power diaphragm pump with high pressure make it suitable for various nozzles.
- Patented heater for obtaining fast heating-up and extending lifespan.

AT850D

Lead-free & ESD Safe Premium Digital Hot Air Station

ESD
SAFE



Specification:

Item No	AT852D	AT850D
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz	
Power	550W	550W
Temperature range	100°C~500°C	100°C~500°C
Air flow	23L/min	23L/min
The handle type	AP-550B+	AP-550B+
Pump	Diaphragm pump	High power diaphragm pump
Timing function	No function	20~600s
Noise	<50dB(A)	<50dB(A)
Package list	Main Unit: 1PCS Gun Holder: 1PCS	Main Unit: 1PCS Gun Holder: 1PCS
	Hot Air Gun: 1PCS AC Cord: 1PCS	Hot Air Gun: 1PCS AC Cord: 1PCS
	Manual: 1PCS Nozzle: 2PCS	Manual: 1PCS Nozzle: 4PCS
Standard packing	Inner box: 33x27.2x19.5(cm) N.W.: 3.8kg G.W.: 4.2kg Carton: 6PCS/Carton Size: 56x35x61.5(cm) N.W.: 22.5kg G.W.: 23.8kg	Inner box: 33x27.2x19.5(cm) N.W.: 3.58kg G.W.: 3.87kg Carton: 6PCS/Carton Size: 56x35x61.5(cm) N.W.: 23.2kg G.W.: 24.3kg
Applicable	● Production line ● Enterprises ● Maintenance	● Institutes ● Education and practice ● Hobby

Nozzles details in page 31.

AT8502D ESD SAFE

2-in-1 Intelligent Lead-free LCD Digital Rework Station



Features:


























- MCU and PID algorithm controlled temperature be more accurate.
- Digital temperature calibration and switchable temperature units make it versatile.
- Diaphragm pump with high pressure make it suitable for various nozzles.
- Intelligence cooling system and deferred power-off function to extend handpiece lifespan.
- Patented heater for obtaining fast heating-up and extending lifespan.
- Automatic standby function to save more energy.

Specification:


Item No	AT-8502D	
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz	
Total Power	700W	
Name	Soldering station	Hot air station
Power	50W	550W
Temperature range	200°C~480°C	100°C~500°C
Pump		Diaphragm
Air flow		23L/min
The handle type	AP-50	AP-551B
Soldering tip	T900-B	
Noise		<50dB(A)
Package list	Main Unit: 1PCS Hot Air Gun: 1PCS Manual: 1PCS Iron Handle Set: 1PCS Gun Holder: 1PCS AC Cord: 1PCS Nozzle: 4PCS Iron Stand: 1PCS	
Standard packing	Inner box: 35.4x33x19.4(cm) N.W.: 4.85kg G.W.: 5.31kg Carton: 4PCS/Carton Size: 68x38x42(cm) N.W.: 21.2kg G.W.: 22.3kg	
Applicable	● Thermoplastic soldering ● Education and practice ● On-site soldering for PVC/PE/PP/PVDF etc. ● Maintenance	

Nozzles details in page 31.

Soldering tips (T900)

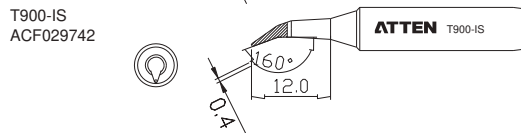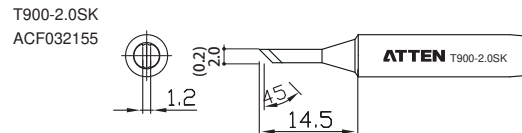

Nozzles (Applicable models: AT8586 AT858D+ ST-8800D ST-8802)

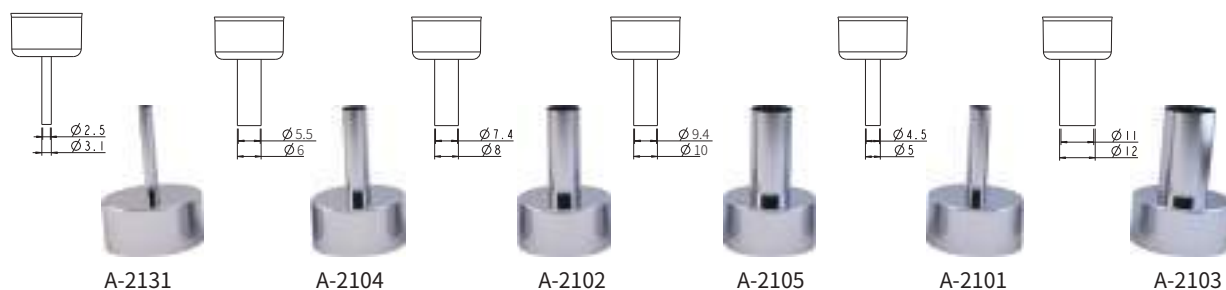


A-2000 nozzle converter
for all nozzles of AT-852D,
AT-850D and AT-8502D





Nozzles (Applicable models: ST-862D)



Nozzles (Applicable models: AT850 AT852 AT8502)

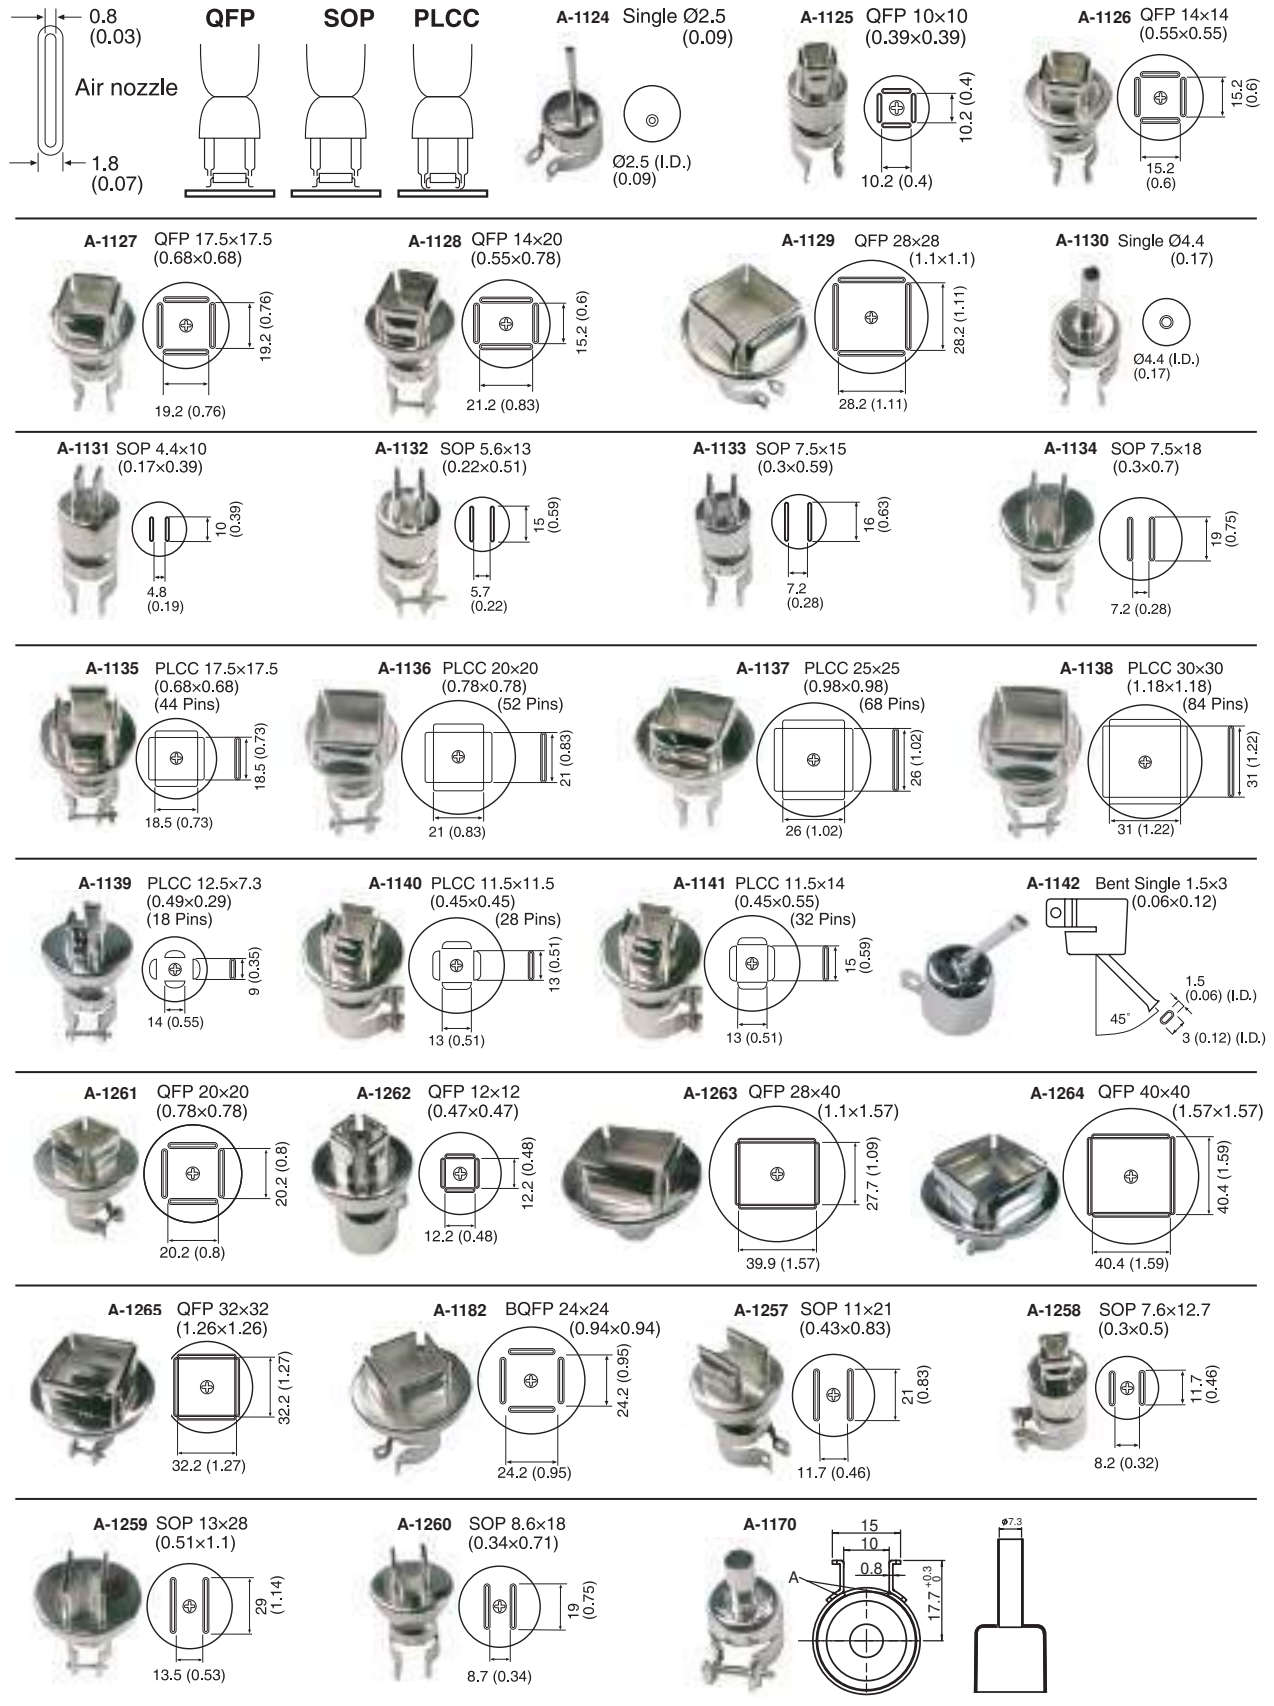

Handle of Soldering station and Hot air station

Category	Item No	Pictures	Applicable models
The soldering station handle	AP-50		AT-937/AT-8586/AT-8502D ROHS
	AP-65		AT-937A(Pluggable heatering element) ROHS
	AP-65A		AT-989/AT-989D ROHS
	SP-65A		ST-8802 ROHS
	SP-60		ST-60 ROHS
	SP-80		ST-80 ROHS
	SP-100		ST-100 ROHS
	SP-990		ST-909 ROHS
	AP-60		AT-938D ROHS
	AP-80		AT-980E ROHS
	SP-65		ST-965(Pluggable heatering element) ROHS
	SP-90B		ST-2090D ROHS
	Y-950		ST-9150(Integrated) 50W ROHS
	Y-9130		ST-9150(Integrated) 130W ROHS
	Y-9150		ST-9150(Integrated) 150W ROHS
	N-9100		ST-9150(Integrated Tweezers) 100W ROHS
	SP-H150		ST-1503(Integrated Tweezers) 100W ROHS
The hot air station handle	AP-700B		AT-858D+/AT-8586 ROHS
	AP-550B+		AT-850D/AT-852D ROHS
	AP-551B		AT-8502D ROHS
	AP-552B		MS-900 ROHS
	AP-102B		ST-862D ROHS
	AP-800B		ST-8800D/ST-8802 ROHS

ST Series Soldering Iron



Features:

- Automatic sleep after 10 minutes inactivity.
- Automatic shut down after 20 minutes inactivity.
- Build in PID system.
- Shortcut temperatures adjust by button.
- LCD / LED display design.
- ESD safe
- Soldering tip designed separate from heater and using exchangeable T2080, T2150, T900 series to save use-cost.




Optional soldering iron stand S-11

Specification:

Pictures					
Item No	ST-2065D	ST-2080	ST-2080D	ST-2150	ST-2150D
Power	65W	80W	80W	150W	150W
Temperature range	80°C~480°C	5set adjustment	80°C~480°C	5set adjustment	80°C~480°C
Temperature stability	±2°C	±2°C	±2°C	±2°C	±2°C
Heater	Four-core PTC heater HS-2065D	Four-core PTC heater HS-2080	Four-core PTC heater HS-2080	Four-core PTC heater HS-2150	Four-core PTC heater HS-2150
Heating indication	Blue LED	Blue LED	Blue LED	Blue LED	Blue LED
Temperature unit	°C/°F	°C	°C/°F	°C	°C/°F
Display method	LCD	LED	LCD	LED	LCD
Soldering tip	T900-B	T2080-B	T2080-B	T2150-B	T2150-B
Package list	Soldering Iron: 1 Unit Iron holder: 1 PCS Manual: 1 PCS				
Standard Pckaging	Inner box: 5.5x4.6x29(cm) N.W.: 0.21kg G.W.: 0.25kg Carton:50pcs/carton Size:49x30.5x33.5(cm) N.W.: 12.5kg G.W.: 13.8kg				


Note: T2080, T2150 series soldering tip details in page 35; T900 series soldering tip details in page 29.

Integrated heater (10W)




T10-1.3D ACF030015	T10-1.2C ACF030014	T10-2.2D ACF030016	T10-3.0D ACF030017	T10-0.5I ACF030018	T10-K ACF030019
-------------------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------	----------------------------

Soldering tips (T2080)

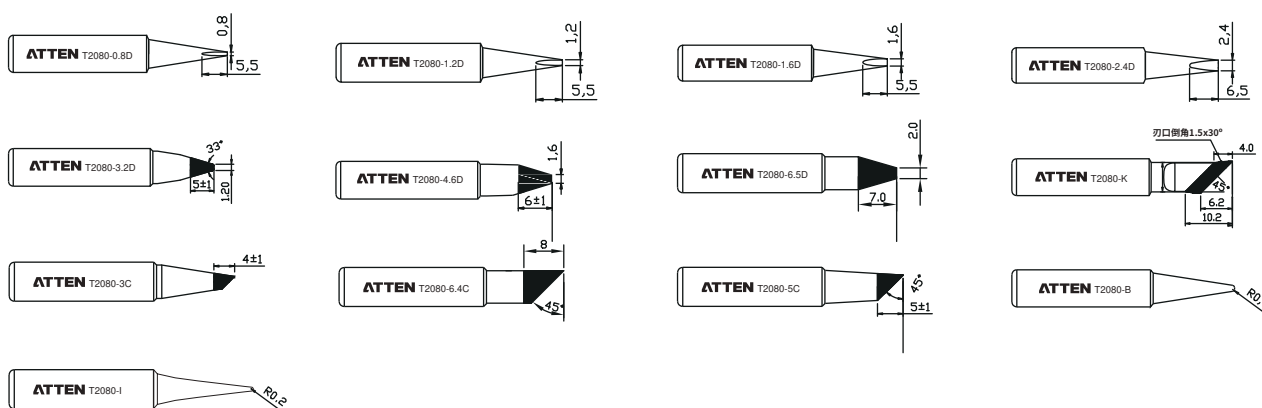

Soldering tips (T2150)

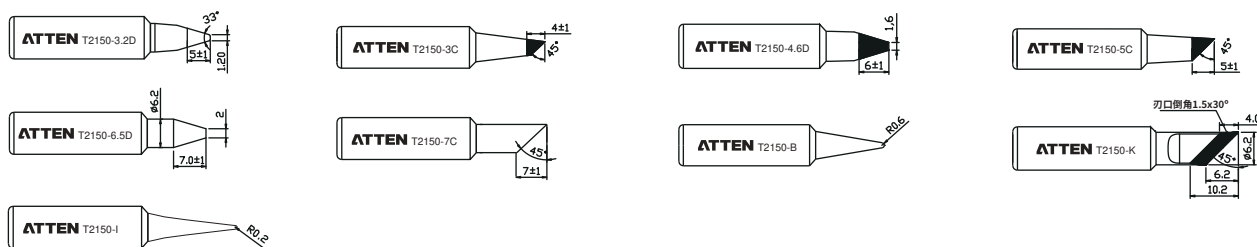

Solder Stand

S-11



S-11

- All-metal construction.
- Portable solder stand which helps.
- Work more convenience.
- The tilt angle is adjustable.



ISO9001:2015



Engineer's partner



SHENZHEN ATTEN TECHNOLOGY CO., LTD.

Add: Floor 8, Building 2, Senyang High-tech Park, 7 West Road
High-tech Park, Guangming New district, Shenzhen 518132, China

Tel: +86-755-8602-1373

Fax: +86-755-8602-1365

Web: www.atten.com

Email: sales@atten.com.cn

Facebook <https://www.facebook.com/attencn/>

